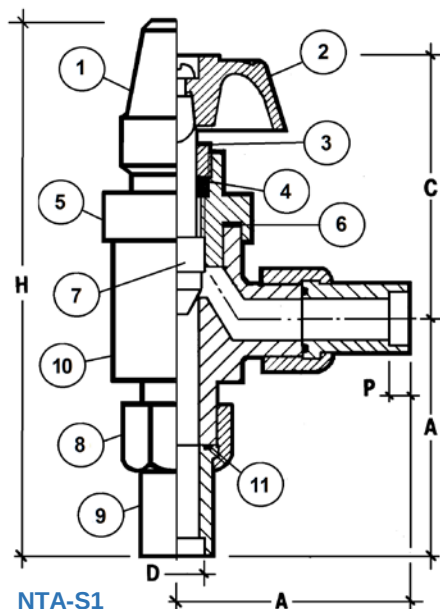


VALVULAS ANGULARES TIPO NTA-S
ANGLE VALVES NTA-S TYPE
MWP 65 BAR
DN 1/4"- 3/8"


REF	DENOMINACION PART NAME	MATERIAL
1	CAPUCHON CAP	ALUMINIO ALUMINIUM
2	VOLANTE HANDWHEEL	ALUMINIO ALUMINIUM
3	TUERCA DEL PRENSA GLAND NUT	A° CARBONO C22 C.STEEL SAE 1020
4	EMPAQUETADURA PACKING	TEFLÓN P.T.F.E.
5	CABEZA BONNET	A° CARBONO C22 C.STEEL SAE 1020
6	JUNTA DE LA TAPA BONNET GASKET	ALUMINIO ALUMINIUM
7	HUSILLO SPINDLE	A° INOX X5 CrNi 18/9 S. STEEL A-304
8	COLETES NIPPLES	A° CARBONO C22 C.STEEL SAE 1020
9	TUERCAS NUTS	A° CARBONO C22 C.STEEL SAE1020
10	CUERPO BODY	A° CARBONO S355J2 C.STEEL A570 gr50
11	JUNTAS DE COLETES NIPPLES GASKETS	ALUMINIO ALUMINIUM

PRESIONES DE PRUEBA
TEST PRESSURES

PRUEBAS TESTS	BAR	PSI
RESISTENCIA DEL CUERPO RESISTANCE TEST OF THE BODY	93 bar	1349 psi
NEUMATICA DEL CIERRE PNEUM. TEST OF THE SEAT SEAL	25	362

CARACTERÍSTICAS
CHARACTERISTICS

- Diseñadas de acuerdo con AD-Merkblatt, EN12284, EN378 para uso con **NH3, CO2 y Freones** como válvulas de servicio con cierre cónico metal-metal. y opción volante o cap.
- Máxima presión de servicio 65 bar.
- Empaquetadura "SF" formada por un anillo elástico de teflón autoajustable.
- Las válvulas de servicio **NTA-S**, como se indica en la página siguiente, se suministran en varias opciones según sus conexiones de entrada y salida, partiendo de tres modelos básicos
 - **NTA-SG** : Ambos extremos roscados 1/2" macho gas
 - **NTA-SL** : Conexión inferior alargada, 50,100 ó 150 mm y extremo BW 1/2"
Conexión lateral rosca 1/2" macho gas
 - **NTA-ST** : Ambos extremos con Tuercas locas con rosca 1/2" hembra gas
- Para otras versiones diferentes de las estándar **NTA-S1÷NTA-S7**, Consultar
- Designed according to AD-Merkblatt, EN12284, EN378 to use with **Ammonia, CO2 and Freons**, as service valves with conical metal-metal seal seat, and hand wheel or cap option.
- **MWP 65 bar.**
- Gland packing "SF" system, stem sealing by one elastic self-fitting Teflon disc.
- The **NTA-S service** valves, as is showed in next sheet, are supplied with several versions according to their connections inlet / outlet, from three basic models
 - **NTA-SG** : Both ends are threaded 1/2" G male
 - **NTA-SL** : Bottom connection with extended branch of L=50,100 or 150, and end BW 1/2"
Side connection, thread 1/2" G male
 - **NTA-ST** : Both ends, with rotary nut with thread 1/2" G female
- Other versions different of the standard **NTA-S1 ÷NTA-S7** are available, but consult please

CONDICIONES MÁXIMAS DE SERVICIO
MAXIMUM SERVICE CONDITIONS

TEMPERATURA TEMPERATURE	-60°C a 150°C
PRESION PRESSURE	65 bar

DIMENSIONES EN MILIMETROS
DIMENSIONS IN MILLIMETRES

DN	L	P	C	D	H	Kv	Cv	Kgs
1/4"	6	55	5	82	9,6	133	0,85	1
3/8"	10	55	5	82	12,8	133	0,85	1